An Economical NanoCell Hotel TV With Pro:Centric Direct

The NanoCell Hotel TV with Pro:Centric Direct provides customers more satisfaction and convenience.
Its content management software, UHD quality and various technology satisfies hotel visitors more and optimizes your hotel brand value.

Pro:Centric
Hotel TV Management Solution

4K UHD
NanoCell Display

User-Friendly Experience

* 65 inch

LG | Business Solutions

ENHANCED COLOR PURITY

NanoCell Technology

NanoCell TV delivers a broad spectrum of color and lifelike accuracy with advanced NanoCell technology, which makes LG Hotel TV best ever.

Nano Color

LG NanoCell TV reproduces true color by applying about 1nm nanoparticles that filter dull color.

Nano Accuracy

Nano Accuracy technology enables seamless, smooth motion with low input lag and offers a realistic visual experience with a wide viewing angle.

SUPERIOR DESIGN TO DELIVER A COMPLETELY IMMERSIVE EXPERIENCE

NanoCell Technology

NanoCell TV delivers a broad spectrum of color and lifelike accuracy with advanced NanoCell technology, which makes LG Hotel TV best ever.
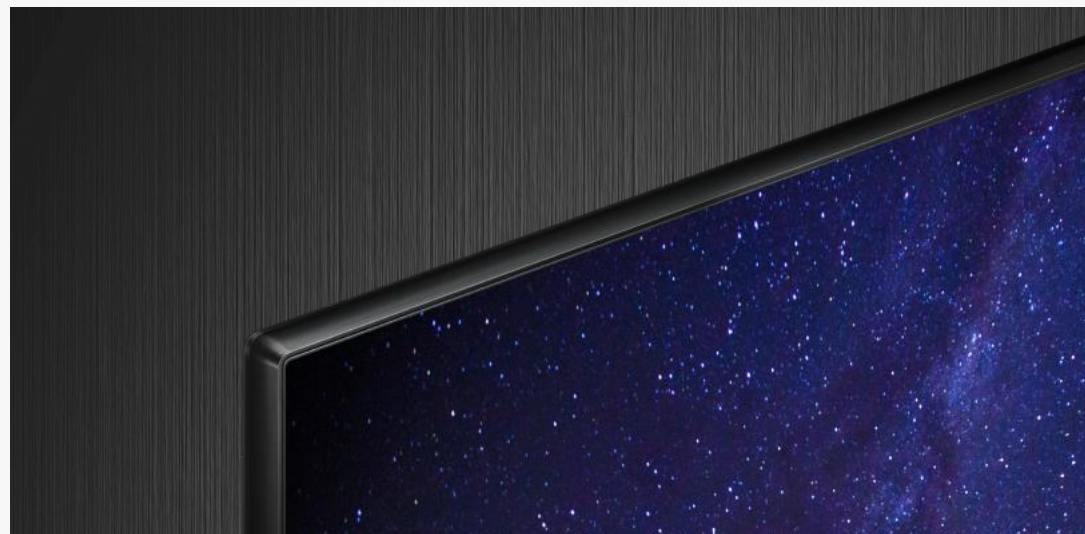

Nano Slim

Slim & Modern design harmonizes with your space.

Nano Bezel

The minimalist design of the Nano Bezel makes you absorbed in the picture.

Pro:Centric Direct Solution

Personalize the guest room television experience with the Pro:Centric Direct, which is a hotel content management system that supports simple editing tools and provides guests' access to a variety of additional features, such as an interactive Electronic Program Guide (EPG), weather forecast and customized electronic billboards for information on hotel amenities. These are all conveniently presented through the on-screen menus and controlled by their TV remote control.

With this solution, users can easily edit the user interface, provide customized service, and efficiently manage all TVs.

SI

Editing Content
with Pro:Centric Direct

Server

IP or RF
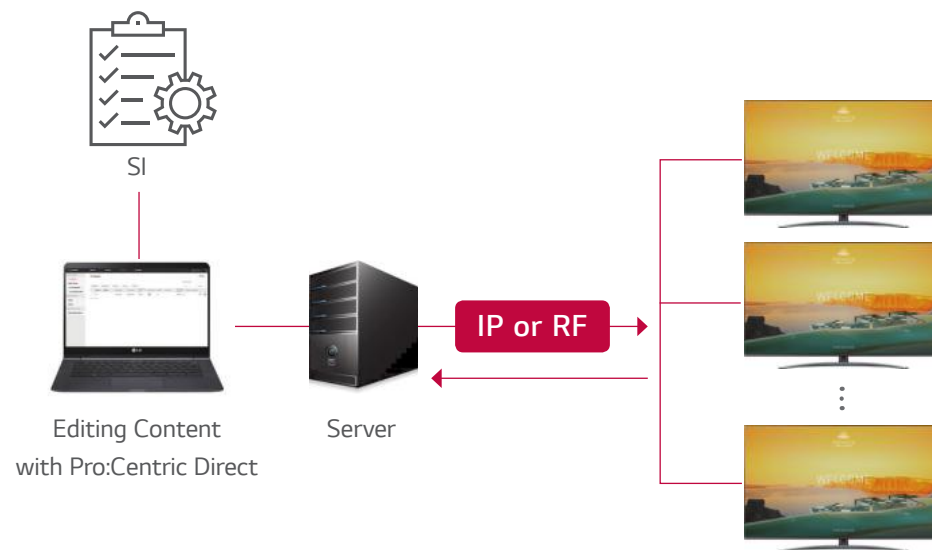
* Actual UI may slightly differ when implemented.

USER-FRIENDLY EXPERIENCE

Instant On

The high speed loading system enables users to enjoy content immediately after turning on the TV.

Commercial Swivel Stand

Expand the range of comfort for the guests with a commercial grade stand by allowing them to watch a TV from any angle.

* 55, 49 inch only

EzManager

EzManager provides a convenient installation function for automatically set up Pro: Centric TV settings without the extra effort of configuration. Auto-installation requires 1-3 minutes while manual installation requires 3-5 minutes.
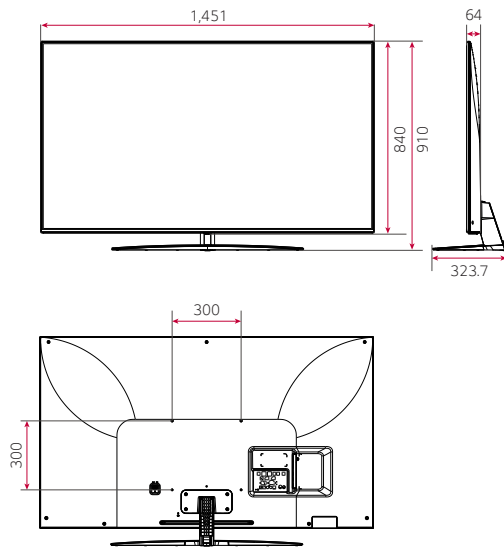

Pro:Idiom

Prevent any illegal copying of content with widely used DRM (Digital Right Management).
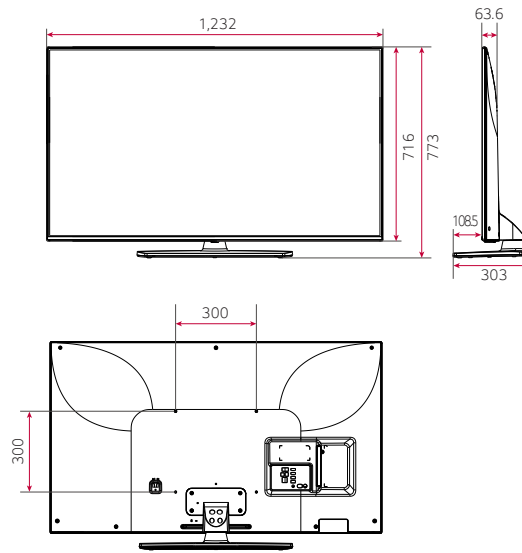
DIMENSIONS (unit: mm)

65"

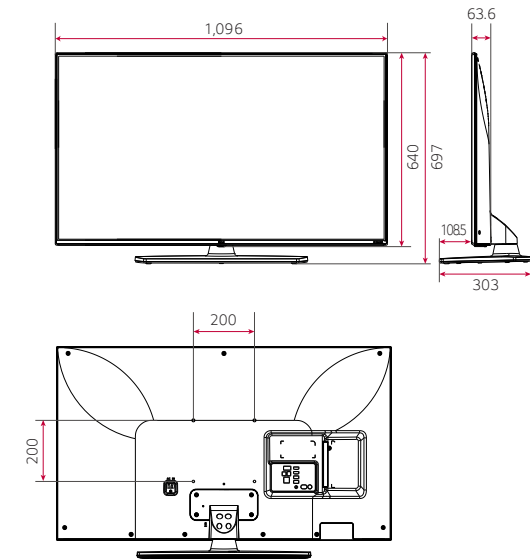1,451 · 64 · 840 · 910 · 323.7 · 300 · 300

55"

1,232 · 63.6 · 716 · 773 · 1085 · 303 · 300 · 300

49"

1,096 · 63.6 · 640 · 697 · 1085 · 303 · 200 · 200

CONNECTIVITY

65" | 55" | 49"

MCR681298 "04"

SPEAKER OUT / LINE OUT · LAN · RIP Use Only · SERVICE ONLY

OPTICAL DIGITAL AUDIO OUT · AV IN (@ Audio in) · HDMI IN 1

RS-232C IN (CONTROL & SERVICE) · RESET · UPDATE · M.PI · ANTENNA/ CABLE IN

For DTS patents, see http://patents.dts.com

Manufactured under license from Dolby Laboratories. Dolby, Dolby Vision, Dolby Audio, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories.

MCR68129804

1 **2** **3**

1 HDMI IN 2 (ARC)

2 HDMI IN 3

3 USB IN

* Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before ordering.

UT567H Series

UT567H Series		65UT567H	55UT567H	49UT567H
DESIGN	Stand Type	1 pole (Fixed)	1 pole (Swivel)	1 pole (Swivel)
	Front Color	- (Nano Bezel. Cinema Screen)	- (Nano Bezel. Cinema Screen)	- (Nano Bezel. Cinema Screen)
DISPLAY	Inch	65	55	49
	Resolution	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)
	Backlight Unit Type	Edge	Edge	Edge
	Brightness	400 nit	400 nit	400 nit
BROADCASTING SYSTEM	TV Reception	ATSC, Clear QAM, Analog NTSC	ATSC, Clear QAM, Analog NTSC	ATSC, Clear QAM, Analog NTSC
VIDEO	HDR 10 Pro / HDR Dolby Vision / HLG	• / - / •	• / - / •	• / - / •
AUDIO	Audio Output	10W + 10W	10W + 10W	10W + 10W
	Speaker System	2.0 ch	2.0 ch	2.0 ch
	DOLBY ATMOS	-	-	-
	One Touch Sound Tuning	-	-	-
	LG Sound Sync	-	-	-
HOSPITALITY SOLUTION	Solution Type	Pro: Centric (Direct, V)	Pro: Centric (Direct, V)	Pro: Centric (Direct, V)
	Data Streaming (IP & RF)	•	•	•
	HCAP (GEM / FLASH / HTML) ※ Service Carousel (TLL / XML)	GEM / HTML5	GEM / HTML5	GEM / HTML5
	IP Return path	-	-	-
	Multicast / Unicast ready	-	-	-
	webRTC (Real Time Communication)	-	-	-
	Pro:Centric Direct (version)	3.5	3.5	3.5
	Pro:Centric Application (version)	PCA3.8	PCA3.8	PCA3.8
	Pro:Centric Server	PCS400R	PCS400R	PCS400R
	DRM	Pro:Idiom (S/W Type), Pro:Idiom Media	Pro:Idiom (S/W Type), Pro:Idiom Media	Pro:Idiom (S/W Type), Pro:Idiom Media
SMART FEATURE		Clock (World Clock / Alarm), EzManager (Simplicity), USB Cloning, Wake on RF, SNMP, Diagnostics (RF Remote), TVLink Interactive (RS-232C, MPI), HTNG-CEC (1.4), Simplink (HDMI-CEC, 1.4), IR Out (RS232C, MPI), Multi IR Code, Anti-theft System (Kensington Lock, Credenza / Security Screw Hole - Except 65", Lock Down Plate - Except 65")		
HOSPITALITY FEATURE		Hotel Mode (Installer Menu), Welcome Screen (Splash Image), Insert Image, One Channel Map (LCM), External Speaker Out (Int / Ext Variable / Fixed), Instant ON, RJP (Remote Jack Pack) Compatibility, Auto Off / Sleep Timer, Motion Eye Care		
JACK INTERFACE	Set Side	HDMI In 2.0 (2), USB 2.0	HDMI In 2.0 (2), USB 2.0	HDMI In 2.0 (2), USB 2.0
	Set Rear	HDMI In (HDCP, 2.0), RF In (Tuner), AV In (Phone Jack Type), Digital Audio Out (Optical), RS-232C (Control & Service), RJ45 : 2 (RJP Interface, Pro:Centric), External Speaker Out (Spk-out & Line Out), MPI Port (RJ12 jack), Debug (Phone Jack Type, CPU/PTC)		
DIMENSION (UNIT : mm / kg)	Vesa	300 x 300	300 x 300	200 x 200
	W x H x D / Weight (with stand)	1,451 x 910 x 323.7 / 25.8	1,232 x 773 x 303 / 20.4	1,096 x 697 x 303 / 17.2
	W x H x D / Weight (without stand)	1,451 x 840 x 64 / 24.1	1,232 x 716 x 63.6 / 17.2	1,096 x 640 x 63.6 / 14.0
	W x H x D / Weight (Shipping)	1,600 x 1,035 x 207 / 33.3	1,360 x 860 x 207 / 25.6	1,192 x 760 x 190 / 20.0
POWER (UNIT : WATTS)	Power Supply (Voltage, Hz)	AC 120 V ~ 50 / 60 Hz	AC 120 V ~ 50 / 60 Hz	AC 120 V ~ 50 / 60 Hz
	Typ. / Max.	165W / 192W	135W / 161W	119W / 145W
	Stand-by	Under 0.5W	Under 0.5W	Under 0.5W

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.